



Common Name

Range	30 Series
Retail Price Band	No Longer Available
Requires	

Electrical Characteristics

Frequency Response	30Hz - 20kHz
Output Sensitivity	3.9mV/Pa
Max SPL	146dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	24dB-A
Output Impedance	100Ω
Recommended Load	
Powering	Phantom 48 only
Supply Current	4mA
Alternative Powering	

Switchable Options

Pad	10dB
Filter/EQ	80Hz 12dB/oct

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Grey
Weight	231g (8.13oz)
Length	119.5mm (4.70")
Min Diameter/Width	21mm (0.82")
Max Diameter/Width	48mm (1.88")
Depth	

The AT3525 offers outstanding performance and versatility, a flat frequency response, and high SPL handling capability. It features a switchable 80Hz high-pass filter and 10dB pad, and includes a multi-position shockmount.

Accessories

Included	Shockmount, protective pouch
Optional	

Frequency curve: Cardioid

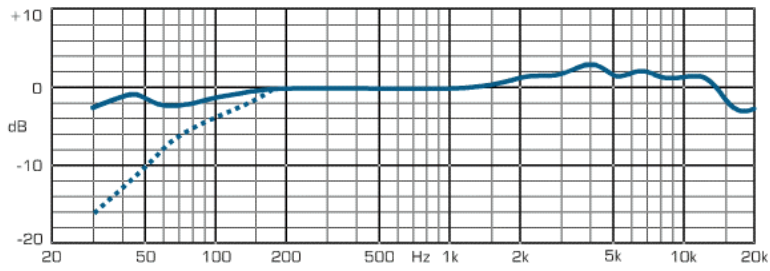

Polar curve: Cardioid

