



Common Name

Range	OM series
Retail Price Band	Under \$500
Requires	


Electrical Characteristics	
Frequency Response	50Hz - 18kHz
Output Sensitivity	2mV/Pa
Max SPL	144dB for
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	
Recommended Load	
Powering	
Supply Current	
Alternative Powering	
Switchable Options	
Pad	
Filter/EQ	
Physical Characteristics	
Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	
Length	
Min Diameter/Width	
Max Diameter/Width	
Depth	

Dynamic hypercardioid features Audix's renowned feedback & noise rejecting VLM capsule technology. Durable zinc alloy construction, electronically cut blast filter with black E-coat finish.

Accessories

Included	Carry pouch, mic clip
Optional	

Frequency curve: Hypercardioid

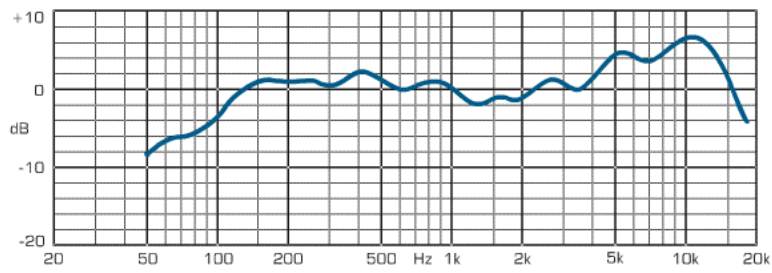

Polar curve: Hypercardioid

