



Common Name

Range	Beta Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 20kHz
Output Sensitivity	2.51mV/Pa
Max SPL	149dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	39dB-A
Output Impedance	136Ω
Recommended Load	1kΩ
Powering	Phantom 12-48
Supply Current	4.6mA
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Tan, black
Weight	35g (1.23oz)
Length	
Min Diameter/Width	
Max Diameter/Width	
Depth	

A headworn microphone featuring a supercardioid pattern to give maximum gain-before-feedback and rejection of ambience. It has an extended frequency response tailored for close use and vocal performance. It can also handle extremely high the extremely high SPL expected in these circumstances. A wireless version with a TA4F connector is also available.

Accessories

Included	
Optional	
	<a href="#">Rycote shockmounts &amp; windshields available for this microphone</a>
	<a href="#">Rycote Lavalier Windjammer available</a>

Frequency curve: Supercardioid

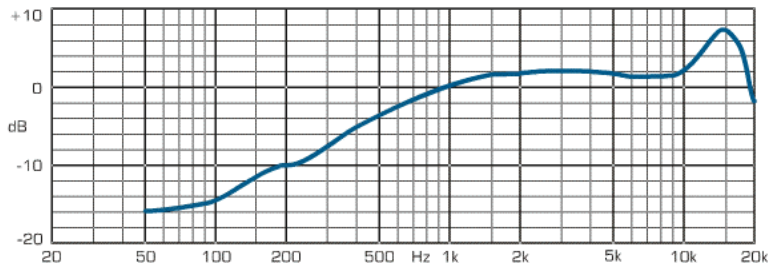

Polar curve: Supercardioid

