



Common Name

Range	SM series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 15kHz
Output Sensitivity	1.9mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	300Ω
Recommended Load	
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	298g (10.49oz)
Length	162mm (6.37")
Min Diameter/Width	23mm (0.90")
Max Diameter/Width	51mm (2.00")
Depth	

Unidirectional dynamic vocal microphone designed for use in sound reinforcement and studio recording. The SM58S variation comes with an on/off switch.

Accessories

Included	Swivel stand adaptor, storage bag
Optional	Windscreen

Frequency curve: Cardioid

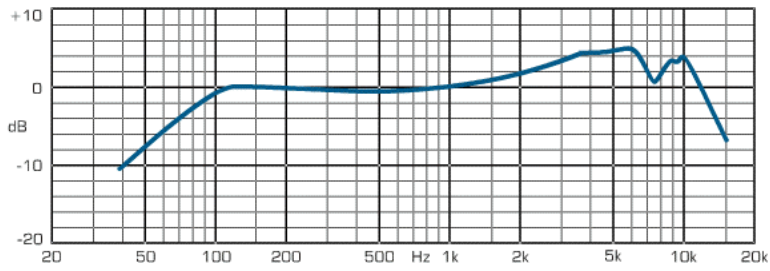

Polar curve: Cardioid

