



Common Name

Range	SM series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 18kHz
Output Sensitivity	2.4mV/Pa
Max SPL	140dB for 0.25%THD
Self Noise (CCIR)	26dB
Self Noise (DIN/IEC)	24dB-A
Output Impedance	100Ω
Recommended Load	0.8kΩ
Powering	Phantom 12-48
Supply Current	1.1mA
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	
Weight	200g (7.04oz)
Length	192mm (7.55")
Min Diameter/Width	21mm (0.82")
Max Diameter/Width	50.8mm (2")
Depth	

Handheld condenser microphone with a flat frequency response and a supercardioid pattern.

Accessories

Included	Swivel adapter
Optional	Windscreen

Frequency curve: Supercardioid

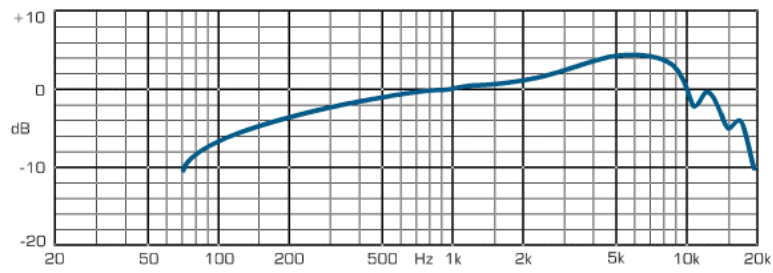

Polar curve: Supercardioid

