



Common Name

Range	Live Sound
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	40Hz - 18kHz
Output Sensitivity	1.2mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	200Ω
Recommended Load	1kΩ
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics

Connector	XLR-3M
Connector Notes	
Available Colours	Black
Weight	220g (7.74oz)
Length	160mm (6.29")
Min Diameter/Width	24mm (0.94")
Max Diameter/Width	24mm (0.94")
Depth	

A very sensitive dynamic microphone with an integral humbucking transformer to eliminate mains-borne interference when working near computer monitors.


Accessories

Included MKV 8 clip, zipped storage pouch

Optional

[Rycote shockmounts & windshields available for this microphone](#)

Frequency curve: Hypercardioid

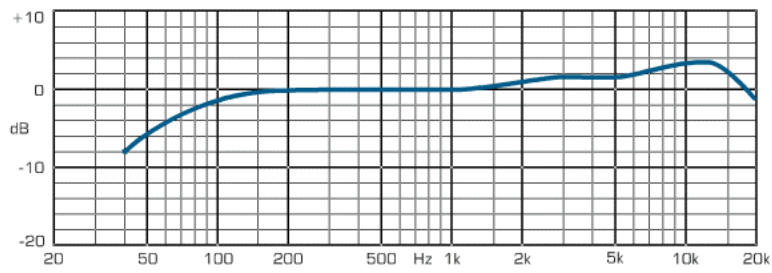

Polar curve: Hypercardioid

