



Common Name

Range	Tour Group
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	40Hz - 18kHz
Output Sensitivity	3mV/Pa
Max SPL	
Self Noise (CCIR)	
Self Noise (DIN/IEC)	
Output Impedance	280Ω
Recommended Load	1kΩ
Powering	
Supply Current	
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Black
Weight	217g (7.64oz)
Length	205mm (8.07")
Min Diameter/Width	24mm (0.94")
Max Diameter/Width	50mm (1.96")
Depth	

A high-performance dynamic microphone with a voice tailored frequency response for maximum intelligibility.

Accessories

Included	MKV 8 clip, zipped storage pouch
Optional	

Frequency curve: Hypercardioid

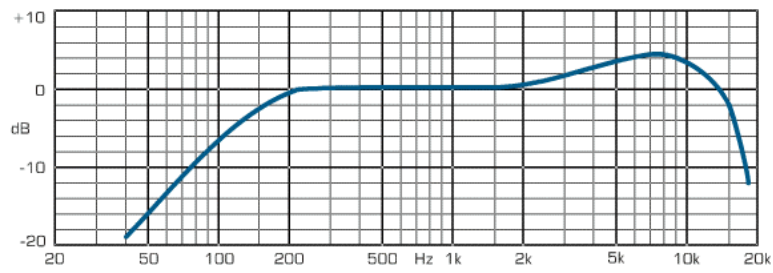

Polar curve: Hypercardioid

