



Common Name

Range MicroMic III Series

Retail Price Band Under \$500

Requires

## Electrical Characteristics

Frequency Response	50Hz - 20kHz
Output Sensitivity	4mV/Pa
Max SPL	131dB for 1%THD
Self Noise (CCIR)	
Self Noise (DIN/IEC)	38dB-A
Output Impedance	200Ω
Recommended Load	1kΩ
Powering	Phantom 12-48
Supply Current	2mA
Alternative Powering	

## Switchable Options

Pad

Filter/EQ

## Physical Characteristics

Connector	XLR-3M
Connector Notes	
Available Colours	Matt black
Weight	62g (2.18oz)
Length	75mm (2.95")
Min Diameter/Width	35mm (1.37")
Max Diameter/Width	
Depth	


Hypercardioid condenser microphone ideal for drum and percussion miking applications.

## Accessories

Included W44 windscreen, carrying case

Optional B15 or B18 battery PSU, N62E or NE66E AC PSU

Frequency curve: Hypercardioid

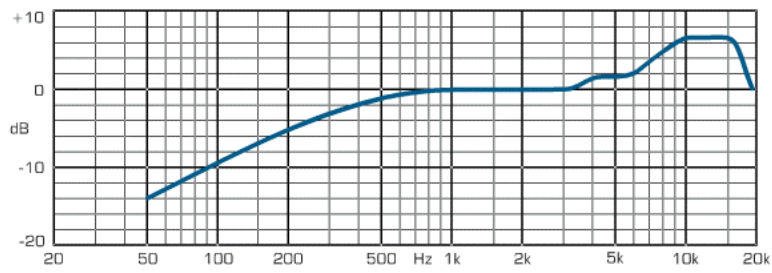

Polar curve: Hypercardioid

