



Common Name

Range	Beta Series
Retail Price Band	Under \$500
Requires	

Electrical Characteristics

Frequency Response	50Hz - 20kHz
Output Sensitivity	2mV/Pa
Max SPL	139dB for 0.25%THD
Self Noise (CCIR)	24dB
Self Noise (DIN/IEC)	22dB-A
Output Impedance	100Ω
Recommended Load	1kΩ
Powering	Phantom 12-48
Supply Current	1.2mA
Alternative Powering	

Switchable Options

Pad	
Filter/EQ	

Physical Characteristics


Connector	XLR-3M
Connector Notes	
Available Colours	Metallic blue
Weight	207g (7.28oz)
Length	192mm (7.55")
Min Diameter/Width	21mm (0.82")
Max Diameter/Width	51mm (2.00")
Depth	

A high-output cardioid version of the BETA 87A.

Accessories

Included Swivel adapter, storage bag
Optional Phantom PSU PS1A, A53M isolation mount, A85WS windscreen

Frequency curve: Cardioid

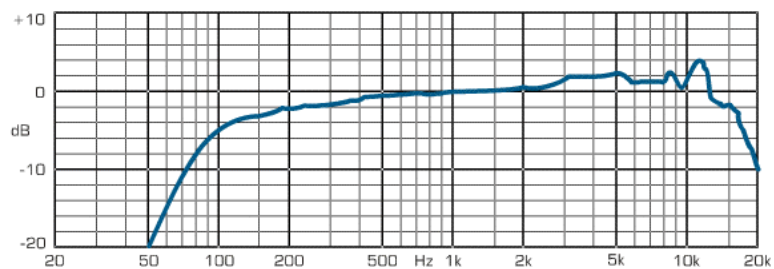

Polar curve: Cardioid

